

ProAlign® Alignment Systems

Optimized for speed and efficiency

NEW!



HUNTER
Engineering Company

Alignment measurements in just minutes!

Pronto alignment systems using HawkEye® digital imaging technology offers shops alignment service optimized for speed and efficiency with simple operation and low cost of ownership.

Digital cameras measure the position and orientation of the wheels with pinpoint accuracy using reflective targets.

step 1 Select the Vehicle

- ✓ Recall specifications



step 2 Measure Angles

- ✓ Install targets
- ✓ Capture measurements
- ✓ Review "before" results




step 3 Make Adjustments

- ✓ Follow the adjustment instructions
- ✓ Print before-and-after results



Present Your Results!

- ✓ Sell more alignments
- ✓ Generate greater profits

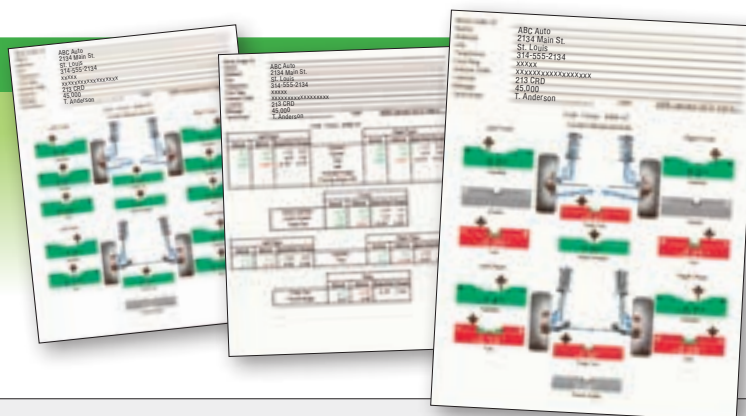

Perform alignments at ANY height

The versatility of the HawkEye® digital imaging technology allows shops to perform alignments on the floor or at any lift height.



Camera height is easily adjusted from the side of the unit.

Reduce long-term cost of ownership

The reflective wheel targets provide a low cost of ownership and require virtually no maintenance.

- ✓ No electronics at the wheel
- ✓ No cables or batteries
- ✓ No calibration required
- ✓ No downtime from accidental drops

Self-centering adaptors easily handle wheels 10 to 24.5 inches (28 in. with optional extensions).



Powerful software features reduce alignment times and increase productivity!



WinToe® Adjustments

Ensure a straight steering wheel every time without repeated adjustments or using a steering wheel holder.

- ✓ A time-saver on nearly every alignment



Control Arm Movement Monitor

Cut adjustment times in half for front-shim, dual-cam or dual-slot vehicles. Step-by-step graphics let you get it right on the first try.


- ✓ Over 60 million vehicles benefit



Shim-Select® II

Eliminate confusing shim charts and tables. Shim-Select® II quickly calculates and displays the template you need for proper shim installation.

- ✓ Over 30 million vehicles benefit

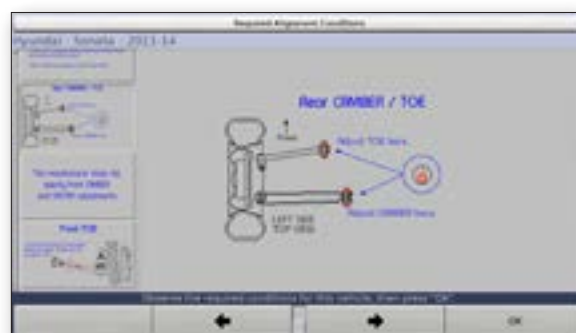


Easy-To-Follow Illustrations

Over 500 adjustment illustrations provide diagrams and instructional information of recommended Original Equipment Manufacturer (OEM) adjustment methods.

ProAlign® printouts help sell work

Explain needed parts and repairs and show completed work to customers using detailed, color-coded printouts.

Clear and detailed printouts help you communicate and build rapport with your customers and sell more alignments.

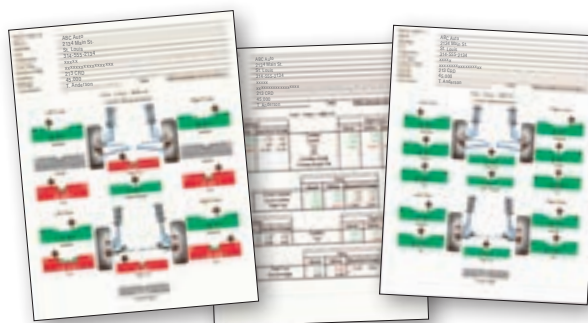

Hunter's DSP700 alignment sensors provide speed and accuracy at an economical price!

EXCLUSIVE

Reversible setups

Interchangeable front and rear sensors avoid obstructions such as air dams or spoilers



Traditional toe arms in front...




... or mounted in rear to avoid obstructions!



Wireless functionality

No cumbersome cables to connect



Quick recharge

Sensors recharge while they are mounted on the aligner



Pro-Comp® Compensation

Continuous runout compensation procedure ensures accurate alignment angles, even if wheels rotate after compensation.



Fast measurement readings

Obtain precise data measurements for toe, toe-out-on-turns, track width and wheelbase in real-time.



Weights less than 7.5 lbs.

Engineered with your technician in mind, DSP700 sensors are up to 50% lighter than previous models.

Greater versatility helps service more vehicles

Hunter's innovative self-centering wheel adaptor

- ✓ Easy to use
- ✓ Lightweight, durable construction
- ✓ Fits a wide range of wheel configurations and sizes



Adaptable rim studs

Fits steel or specialty rims with run-flat and flange-guard tires.



Sturdy design

Durable, lightweight design provides rigidity and stability.



Extended range

Stud slots extend coverage from 10 to 24.5 inches.




Extend range of service with these options

Tire Clamp Adaptor Fits Difficult Wheels

OPTIONAL



- ✓ Fastens to tires with 21 to 40 in. outside dimension
- ✓ Includes 4 tire clamps with protective rim sleeves

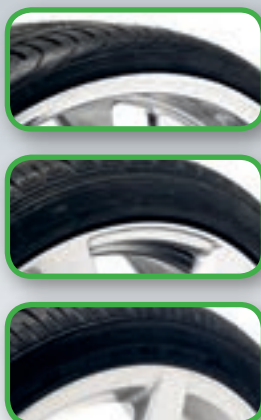

Ideal for use on wheels without rim lips or when space between tire and rim is limited.


Extensions Expand Coverage

OPTIONAL



- ✓ Expands adaptor range up to 28 in.
- ✓ Includes 16 adaptor extensions, 4 for each adaptor

Camera configurations

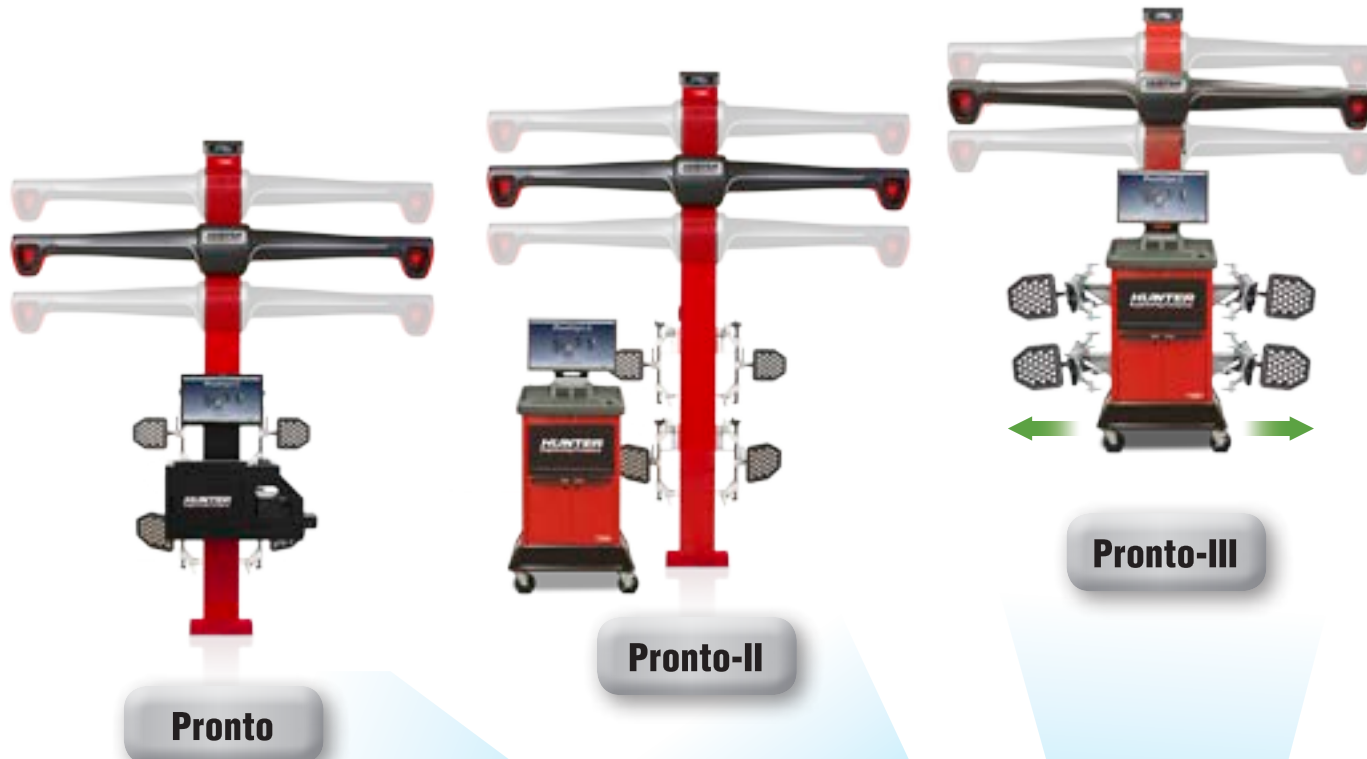

	Pronto	Pronto-II	Pronto-III
ProAlign® 2 alignment software	✓	✓	✓
High-definition targets	✓	✓	✓
24-in. LCD flat panel display	✓	✓	✓
Console (with color printer)	Post-mount	Mobile	Mobile
Sensors (2-camera, manual-lift)	Floor-mounted	Floor-mounted	Console-mounted*

Specifications

Track width	80 in. front, 112 in. rear
Wheelbase	210 in.
Console dimensions	
Post-mount	40 in. (H) x 36 in. (W) x 24 in. (D)
Mobile	65-68 in. (H) x 32 in. (W) x 25 in. (D)
Power requirements	100-240V, 10A, 50/60Hz

Standard equipment

- ✓ Wireless remote control
- ✓ Brake pedal depressor
- ✓ Steering wheel holder

* Mobile, console-mounted sensors allow service of multiple alignment bays

Conventional sensor configuration



Presto

- ✓ ProAlign® 2 alignment software
- ✓ 24-in. LCD
- ✓ Mobile console with color printer
- ✓ DSP700 cordless sensors

Standard equipment

- ✓ Wireless remote control
- ✓ Brake pedal depressor
- ✓ Steering wheel holder

Specifications

Track width	80 in. front, 112 in. rear
Wheelbase	210 in.
Console dimensions	65-68 in. (H) x 32 in. (W) x 25 in. (D)
Power requirements	100-240V, 10A, 50/60Hz

DSP700 sensors require Hunter alignment systems running WinAlign® version 11.1 (or greater) or ProAlign® version 1.10 (or greater).

Grow your equipment with your business!



WinAlign® upgrade

WinAlign® alignment software maximizes profit and productivity in your alignment bay.

- ✓ CodeLink® electronic steering reset tool
- ✓ ExpressAlign® procedures
- ✓ Tools & kits
- ✓ WebSpecs® online specification database
- ✓ HunterNet® online shop statistics
- ✓ 100s of additional power tools and training aides



HawkEye Elite®* upgrade

Hunter's HawkEye Elite® alignment system saves valuable shop time and increases profits.

- ✓ Three-dimensional QuickGrip® targets
- ✓ Four high-resolution cameras
- ✓ QuickComp®, single-motion compensation
- ✓ No metal-to-metal contact with wheel
- ✓ Decreased setup time
- ✓ Quick-change arms eliminate adjustment knobs

* Requires WinAlign® software and key upgrade

Because of continuing technological advancements, specifications, models and options are subject to change without notice.

WinAlign, ProAlign, HawkEye, HawkEye Elite, WinToe, Shim-Select, Pro-Comp, Level Reminder, Cal-Check, CodeLink, ExpressAlign, WebSpecs, HunterNet, QuickGrip and QuickComp are registered trademarks of Hunter Engineering Company.

0516HH

HUNTER
Engineering Company
www.hunter.com